

aleddra, Your Choice for LED Lighting Solutions!

Aleddra “Double-Safety Switch”

Linear LED Tube

UL Approved

Patent Pending


www.aleddra.com



Length	4 ft	2 ft
Approx. Equivalence	32W	16W
Socket Type	Bi-Pin	
Voltage	110V, 277V	
Consumption Power	18.5W ± 10%	9.0W ± 10%
Color Temperature	3000K, 4100K, 5000K, 6000K	
CRI	74	
Lumen Output	1800 lm ± 10% @ 6000K	900 lm ± 10% @ 6000K
Beam Angle	120° ± 5°	
LM-79	Rated @ 4100K	
Lens Type	Clear , Frosted	
Weight	12 oz	6 oz
Length	47 3/4 in	23 5/16 in
Tube Type	T8	
Operating Temperature	-20 °C to +50 °C	
UL Listed	#E325073	
Body Material	Aluminum + PC	
RoHS Compliant	Yes	
Rated Life	Up to 50,000 Hours	
Ratings	Approved for Indoor Applications	
Warranty	3 Years	

Features & Benefits:

- Energy Efficient:
Saves Money
- Long Working Life:
Low Maintenance Cost
- Quick Installation:
Saves Time & Money
- Easy to Install:
Fits in Existing Fixtures

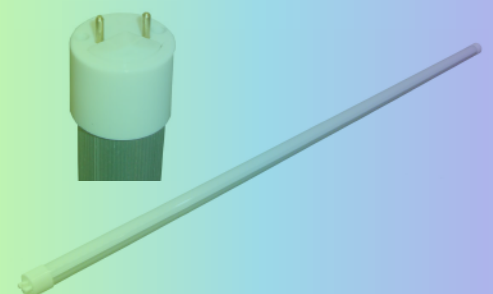

Ordering Information:

Length	Tube Type	Lens Type	LED Chip	LED Color	Beam Angle	Voltage	Color Temperature Value
L L T -	2 - 2 feet 4 - 4 feet	T8 - T8 D - Diffused	C - Clear S - SMD Type	W - White	120 - 120°	110V - 110V 277V - 277V	30K - 3000 K 41K - 4100 K 50K - 5000 K 60K - 6000 K

aleddra

by Lightel Technologies, Inc.

t +1.425.430.4555 • f +1.425.277.5289 • www.aleddra.com

lighting facts		CM
Light Output (Lumens)		1592
Watts	18.6	
Lumens per Watt (Efficacy)	85	
Color Accuracy		74
Color Rendering Index (CRI)		
Light Color		4173 (Bright White)
Correlated Color Temperature (CCT)		
Warm White	Bright White	Daylight
2700K	3000K	4500K
5000K	6000K	
<small>All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.</small>		
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>		
<small>Registration Number: NBAG-3P-36LW Model Number: LLT-4-T8-C-S-SW-120-277V Type: Replacement lamp - Linear T8/T5/T12 tube</small>		