



Class I, Division 2
Groups A,B,C,D,T4A/T5
Ex II 2G Ex mb eb IIC T4 Gb

Applicable to
55°C
Environment



- 2 mounting bracket optional.
- 3 different glass optional.
- Wiring cavity, helps to isolate the operator and the driver so as to make wiring safer.
- wire guard-prevent the glass from being broken.

Accessories



Clear glass



Clear striped
spherical glass



U-shaped glass



Bracket



Flat wire guard



Wire guard



U-shaped wire guard

ALEDDRA®

Tel: 425.430.4555 | Email: sales@aleddra.com | www.aleddra.com

Hazardous Location LED Round Light



Application


Warehouse, factory and workshops; Petroleum and petrochemical area, and gas station; Power, railway, ship port, public security, fire protection and other fields.

Specifications


Input Wattage	30W	60W	100W	150W	200W	240W	300W	400W
Voltage	120-240VAC, 120-277VAC, 50/60Hz			120-240VAC, 120-277VAC, 277-480VAC, 50/60Hz				
Lumen Output	3900-4200lm	7500-8100lm	13500-14500lm	20250-21750lm	28000-31000lm	33600-37200lm	42000-46500lm	56000-62000lm
Efficacy	130-140lm/w	125-135lm/w	135-145lm/w	135-145lm/w	140-155lm/w	140-155lm/w	140-155lm/w	140-155lm/w
Color Rendering Index	>80							
Color Temperature	3000K, 4000K, 5000K, 5700K, 6500K							
Lens	Clear glass, Clear striped spherical glass, U-shaped glass							
Beam Angle	30 Degree, 60,70,80,90 Degree, 110 Degree, 120 Degree							
PF	>0.9							
THD	≤20%							
Housing Color	Yellow, Grey							
Operating Temperature	-40°C TO 55°C (-40°F TO 131°F)							
Weight	1.4KG	1.4KG	5.75KG	5.75KG	13.77KG	13.77KG	14.52KG	14.5KG

Dimensions


30W,60W

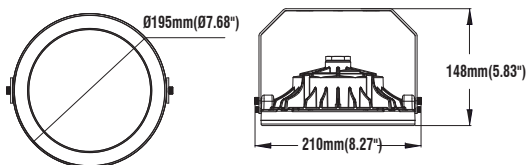

100W,150W

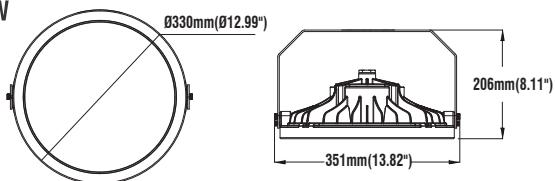

200W,240W
300W,400W

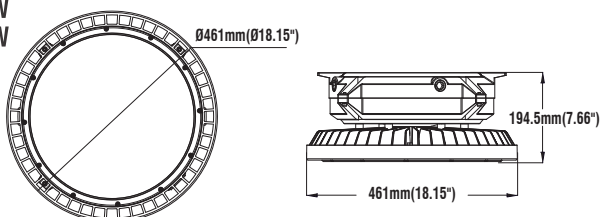

Installation Diagram

