


D-Style LED CANOPY LIGHT INSTALLATION

INSTALLATION INSTRUCTIONS

* **Risk of electrical shock, make sure turn off power supply before installation or servicing.**

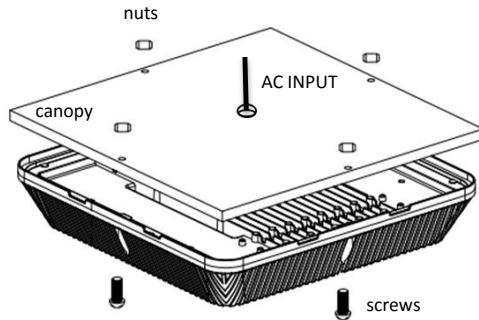

Picture-1

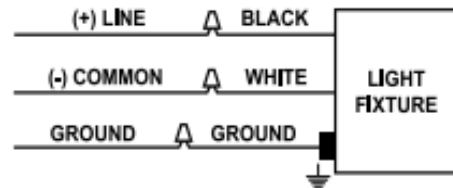


Fig. 1

Circuit Diagram

Mounting Accessories (customer supplied)

- * 4pcs M6 metal screws with nuts (not supplied)
- * Junction Box (not supplied)

Installation

STEP 1: Cut a hole ($\Phi 8\text{mm}$ Min) for AC power supply wire.

STEP 2: Mount the luminaire to canopy, insert and tighten 4pcs metal screws onto the ceiling, use another 4 nuts to fix the screw from above the canopy.

STEP 3: Apply sealant around screw and wire holes and the edge of the junction box if exist for a complete seal.

STEP 4: Connect the AC power supply to the lead of the luminaire. If needed a waterproof junction box can be used for wiring.

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean lens & fixture with non-abrasive glass cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED

WARNING

The unit is designed for years with minimum care. For optimum performance, periodically clean the reflector and lens with a mild, non-abrasive glass cleaner and soft cloth. Do NOT use solvents or cleaners containing abrasive agents. When cleaning the fixture, make sure you have the power turned off and do not spray liquid cleaner directly onto the LED, socket, or wiring.